

Technical Doc. :	ST_PTSC-65TD_R010.docx
Equipment:	PTSC-65TD
Revision :	1.0



Model: PTSC-65TD - 65 inch Multimedia AIO


1. 4MM Tempered Anti Glare Glass
2. Wide Viewing Angle 89°/89°/89°/89° (R/L/U/D)
3. Aluminum Alloy Bezel+ SPCC Back Case

Monitor I/O Interfaces	
USB	1x USB
HDMI	1xHDMI
DVI-D	1xDVI-D
Speaker	2 x 5 W
Audio Input	PJ-325, φ CK3.5
Audio Line Out	PJ-325, φ CK3.5
LCD panel	
Panel size	65"
Resolution	1920
Aspect ratio	16:9
Support Color	1.07 Billion Colors
Brightness	350 cd/m ²
Response time	6ms
Contrast ratio	5000:1
View angle	89°/89°/89°/89° (R/L/U/D)

Technical Doc. :	ST_PTSC-65TD_R010.docx
Equipment:	PTSC-65TD
Revision :	1.0

Power Supply	
Input voltage	AC100-240v 50/60HZ
Power consumption	≤250W
Enclosure	
Material	Aluminum Alloy Bezel+ SPCC Back Case
Color	Silver Bezel, Black Case
VESA mounting	400x400mm
Operating Environment	
Working temperature	0°C~50°C
Storage temperature	-10°C~60°C
Relative humidity	5-95% (non-condensing)
Packing Details	
Net weight	47 kg
Gross weight	55 kg
Product dimension	1558.5mm×945.2mm×105mm
Packing size	1695mmx1078mmx225mm
Other	
Warranty	1 year warranty
Touch panel - Optional	
Touchscreen Type	10 Points Infrared Touch
Luminousness	92%
Surface Hardness	6H
4K panel - Optional	
Resolution	4K 3840*2160
Addon Boards - Optional	
RK3288	Android 7.1 +2G RAM+ 8GB Flash+WIFI
Intel Baytrail J1900	Windows+4G RAM+64GB SSD+WIFI
Intel Core i3, or i5, or i7	Windows+4G RAM+64GB SSD+WIFI

Technical Doc. :	ST_PTSC-65TD_R010.docx
Equipment:	PTSC-65TD
Revision :	1.0

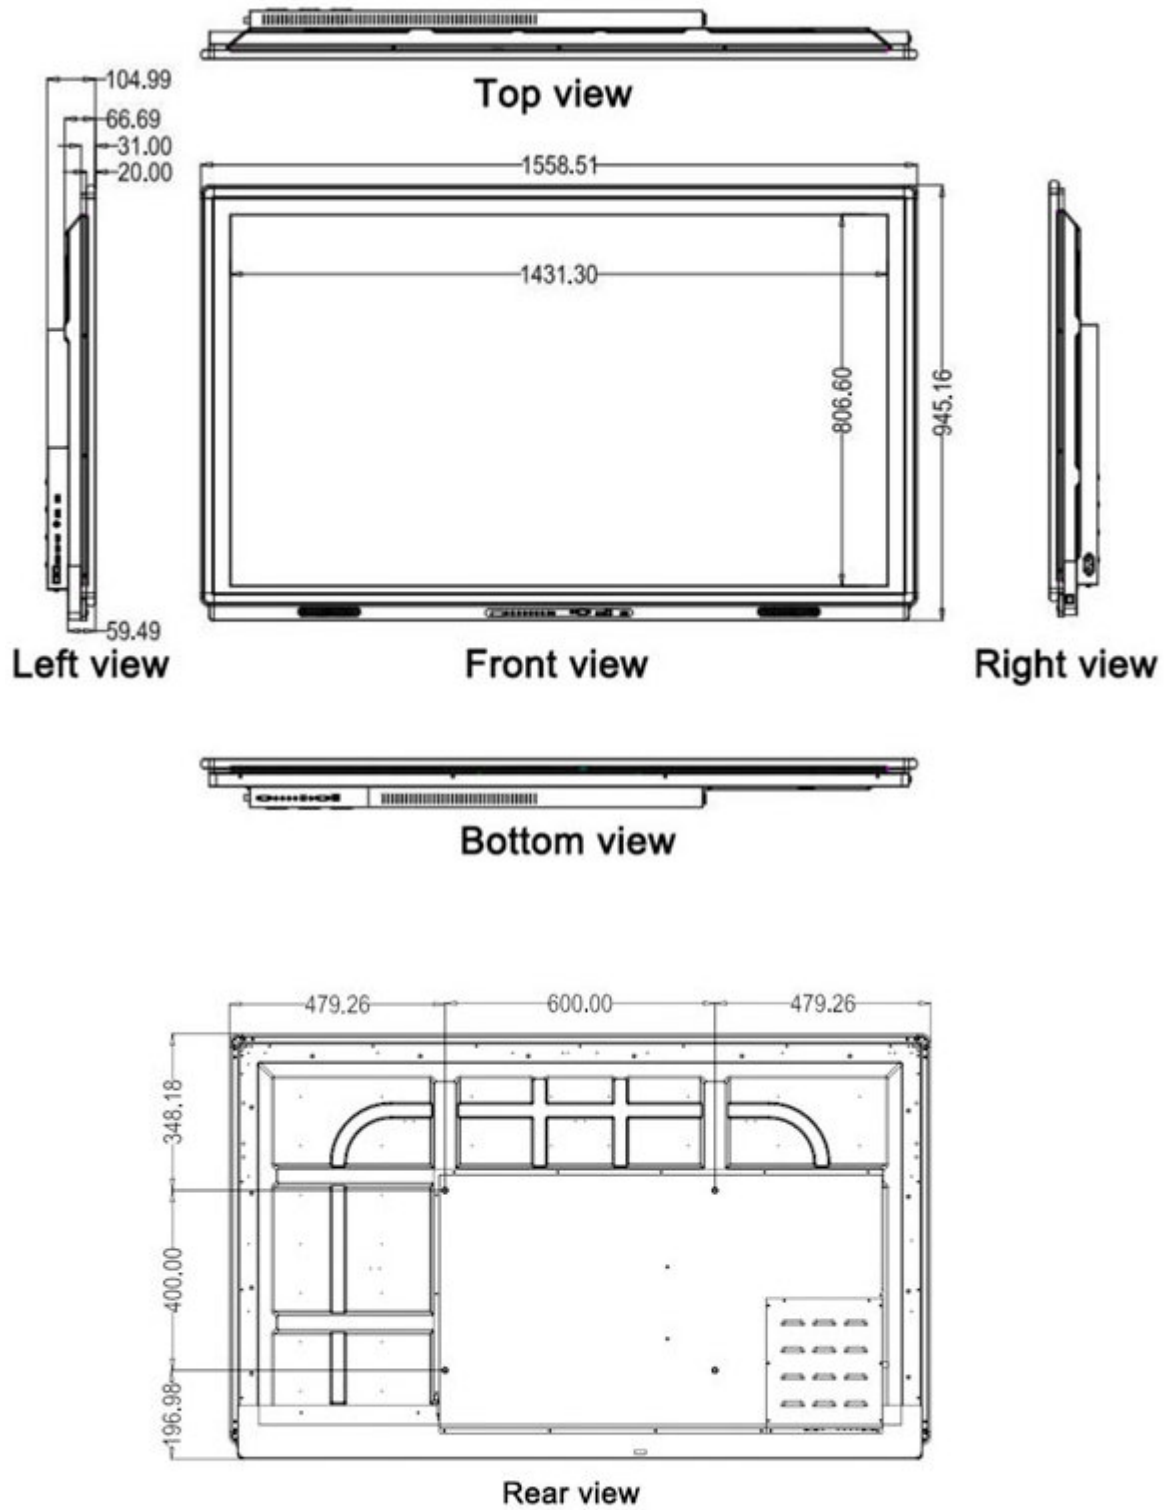

Unit: mm